


# Static Loading Platform



Skylift Static Loading Platform stands out for its load capacity, easy and safe handling, as well as the possibility to adjust the cantilever. Static Type is used for moving equipment and materials professionally in and out during construction. It's ideal for situations where compact places working height at a premium, and where maximum clearance is significant. The loading platform props are optional, which comes into a structure as a simple propping system between floors. Skylift Loading Platform designed and manufactured as per to BSEN-15635, TUVSUD-SOP-38, LOLER international standards.

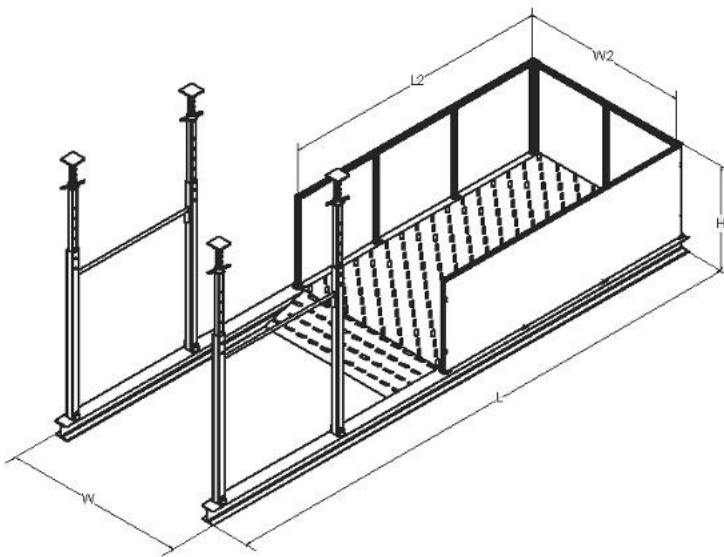

**OUR LIFTING  
PRODUCTS**  
CERTIFIED BY



MODEL	CAPACITY(TON)	DIMENSIONS (mm)					WEIGHT (Kg)
		W	W2	H	L	L2	
SKL 3000 SLP	3	2100	2050	1275	6000	3400	1650
SKL 5000 SLP	5	3100	3050	1320	8400	5450	3000